

EQUITY LINE

- BY BARRON LIGHTING GROUP -



VALUE-ENGINEERED
LIGHTING SOLUTIONS



LONG-LIFE
DEPENDABLE SERVICE



IN-STOCK
READILY AVAILABLE



ULTIMATE PERFORMANCE. UNPARALLELED VALUE.

QXS Series

Universal Red/Green, Slim Thermoplastic Exit



- Universal, field-selectable red/green LEDs and color-matched diffusers eliminates need to stock both colors
- Universal, field-selectable single-/double-face
- Easy snap-out, field-selectable chevrons
- Suitable for Damp Locations
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QXS-U-WB-WH

Model	Legend Color	Power Source	Finish
QXS	U = Universal Red/Green Letters	[BLANK] = AC Only WB = Battery Backup	WH = White

QCRS Series

Universal Red/Green, Slim Thermoplastic Combo



- Universal, field-selectable red/green LEDs and color matched diffusers eliminates need to stock both colors
- Universal field-selectable single-/double-face
- Two (2) 0.5W fully adjustable round heads with long-lasting high-intensity LED lamps
- Easy snap-out, field-selectable chevrons
- Suitable for Damp Locations
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QCRS-U-WH

Model	Legend Color	Finish
QCRS	U = Universal Red/Green Letters	WH = White

QXEDGP Series

Thermoplastic Edge-lit Exit



- UV-stabilized, ultra-clear, acrylic edge-lit panel provides consistent, uniform illumination
- Field-selectable chevrons with self-adhesive appliques and guide template provided
- Suitable for Damp Locations
- Suitable for ceiling, end or wall mount
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QXEDGP-D-RM-WB-WH

Model	Number of Faces	Power of Source	Legend Color	Finish	Options
QXEDGP	S = Single-face D = Double-face	WB = Battery Backup	RC ¹ = Red Letters/Clear Panel RM = Red Letters/Mirror Panel GC ¹ = Green Letters/Clear Panel GM = Green Letters/Mirror Panel	WH = White	G2 ² = Self-test/Self-diagnostics

Notes

¹ Single-face only

² Lead times apply, consult factory

QXT Series

Thin Thermoplastic Exit



- Universal, field-selectable single- or double-face
- Easy snap-out, field-selectable chevrons
- Suitable for Damp Locations
- Suitable for ceiling, end or wall Mount
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QXT-R-WB-WH

Model	Legend Color	Power Source	Finish
QXT	R = Red Letters	[BLANK] = AC Only WB = Battery Backup	WH = White

QCRT Series

Thin Thermoplastic Combo



- Universal field-selectable single-/double-face
- Easy snap-out, field-selectable chevrons
- Two (2) 1.1W fully adjustable round heads with long-lasting high-intensity LED lamps
- Suitable for Damp Locations
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QCRT-R-WH

Model	Legend Color	Finish
QCRT	R = Red Letters	WH = White

QCSS Series

Slim Thermoplastic Combo



- Universal field-selectable single-/double-face
- Two (2) 1.0W fully adjustable square heads with long-lasting, high-intensity LED lamps
- Easy snap-out, field-selectable chevrons
- Suitable for Damp Locations
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QCSS-R-WH

Model	Legend Color	Finish
QCSS	R = Red Letters	WH = White

QMS Series

Micro LED Thermoplastic Emergency Unit



- Two (2) 0.5W fully adjustable round heads with long-lasting high intensity LED lamps
- Suitable for Damp Locations
- Suitable for Wall Mount
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QMS-WH

Model	Finish
QMS	WH = White

QMR Series

Micro LED Thermoplastic Emergency Unit



- Two (2) 1.0W fully adjustable square heads with long-lasting, high-intensity LED lamps
- Suitable for Damp Locations
- Suitable for wall mount
- California Energy Commission (CEC) Title 20 Compliant

ORDERING INFORMATION Example: QMR-WH

Model	Finish
QMR	WH=White

RS2 Series

LED Steel Emergency Lighting Unit



- High impact, injection molded, thermoplastic LED lamp heads
- 1.5W (12 LEDs x .125 watt) per lamp head Suitable for wall mount
- Enclosure constructed of rugged 20 gauge steel
- Remote capacity of 20W, compatible with MLED LED remote lamps
- Extended run time (up to 8 hours without remotes)
- Meets City of New York Emergency Code requirements

ORDERING INFORMATION Example: RS2-6-27-WH

Series	Battery	Wattage	Finish	Accessories ¹ (Field Installed)	
RS2	6 = 6 Volt Lead Calcium	27 = 27 Watts	BL = Black	WG-S = Wire Guard (Back Mount)	MLED2-B = Indoor Double Remote Black
			WH = White	XG-PS = Poly Guard (Back Mount)	MLED1-G-WP = Outdoor Single Remote Gray
Notes				MLED1-W = Indoor Single Remote White	MLED2-G-WP = Outdoor Double Remote Gray
				MLED2-W = Indoor Double Remote White	MLED1-B-WP = Outdoor Single Remote Black
				MLED1-B = Indoor Single Remote Black	MLED2-B-WP = Outdoor Double Remote Black

¹ Order as separate line item

WTA Series
Adjustable LED Wallpack



- Housing can be adjusted from 0° to 90° for forward throw (10° increments)
- Die-cast aluminum housing in a powder coated bronze finish with stainless steel hardware
- UV-stabilized polycarbonate lens
- Up to 10,500 lumens for a variety of applications
- Available in 3000K, 4000K and 5000K CCT
- Type III distribution pointing down (3000K – Type II)
- DesignLights Consortium® (DLC) PREMIUM Qualified

ORDERING INFORMATION Example: WTA-40-VS-3K-BR-PC

Series	Wattage	Input Voltage	CCT	Finish	Options (Factory Installed)	Accessories ¹ (Field installed)
WTA	27 = 27W	VS = 120/277VAC	3K = 3000K	BR = Bronze	PC = Button Photocontrol 120/277VAC	PCU = Button Photocontrol 120/277VAC
	40 = 40W		4K = 4000K			
	67 = 67W		5K = 5000K			
	80 = 80W					

Notes
¹ Order as a separate line item, shipped in a separate box for installation in the field

MWQ Series
Mini Die-Cast Aluminum LED Wallpack



- Die-cast aluminum enclosure with bronze powder-coat finish
- Field-adjustable color temperature, 3000K, 4000K or 5000K CCT
- Efficacies up to 140 LPW maximize energy savings
- Sealed design for use in Wet Locations, IP65 Rated
- DesignLights Consortium® (DLC) PREMIUM Qualified

ORDERING INFORMATION Example: MWQ-20-C-BR

Series	Description
MWQ-20-C-BR	Mini Die-Cast Aluminum LED Wallpack 20W, CCT Selectable 3000K-4000K-5000K, 120-277 VAC, Bronze Finish, Integral 120/277VAC Photocontrol

RWE Series

LED Glass Refractor Wallpack



- Updated LED light engine, higher efficacy in a traditional design
- Power switchable between 29W-40W-60W or 60W-100W-120W
- CCT switchable between 3000K-4000K-5000K CCT
- Efficacies up to 148 LPW maximize energy savings and utility rebates
- Available sensor and battery backup options and accessories

ORDERING INFORMATION Example: RWE-M-60-VS-CP-BR

Series	Description	Options
RWE-S-60-VS-CP-BR	Small, 60W (Switchable; 29W-40W-60W), 120-277VAC, CCT Selectable (3000K-4000K-5000K), Bronze Finish	BB ¹ = Battery Backup
RWE-M-60-VS-CP-BR	Medium, 60W (Switchable; 29W-40W-60W), 120-277VAC, CCT Selectable (3000K-4000K-5000K), Bronze Finish	
RWE-M-120-VS-CP-BR	Medium, 120W (Switchable; 60W-100W-120W), 120-277VAC, CCT Selectable (3000K-4000K-5000K), Bronze Finish	

Notes

¹ Only available with RWE-M-60-VS-CP-BR

² Order as a separate line item; shipped in separate box for field installation

Accessories² (Field Installed)

TL-MSC = Dimming Occupancy Sensor

TL-MSC-REMOTE = Remote Control for TI-MSC

RQHL Series

Round LED Highbay



- Multiple lumen packages from 9,100 to 30,000 lumens
- Efficacies up to 140 LPW maximize energy savings
- Sealed design for use in Wet Locations, IP65 Rated
- 3/4" Hook, 6' whip and security cable included
- DesignLights Consortium® (DLC) Qualified
- Battery backup, integral sensor and mounting options available

ORDERING INFORMATION Example: RQHL-97-VS-4K-BL-BB

Series	Wattage	Input Voltage	CCT	Finish	Options (Factory Installed)
RQHL	67 = 67W	VS = 120/277VAC	4K = 4000K	BL = Black	BB ¹ = Battery Backup
	97 = 97W		5K = 5000K		SC = Motion Sensor
	140 = 140W				
	190 = 190W				
	215 ¹ = 215W				

Notes

¹ Battery Backup (BB) not available with 215W configuration

² Order as a separate line item, shipped in a separate box for installation in the field

Accessories² (Field installed)

RQHL-YK-BL = Yoke Mount Bracket (67W, 97W, 140W, 190W), Black Finish

RQHL-YK2-BL = Yoke Mount Bracket for RQHL-215W, Black Finish

RQHL-BB-A-BL¹ = 8W Battery backup kit, black finish (67W & 140W)

RQHL-BB-B-BL¹ = 8W Battery backup kit, black finish (97W & 190W)

TL-MSSW-REMOTE = Remote for dimming sensor option (SC)

LC6T = 6' Line cord, L7-20P plug (300V)

LC15 = 15' Line cord, blunt end (300V)

LC15T = 15' Line cord, L7-20P plug (300V)

20300032 = Field-installed In-line 10kVA surge protector for 120/277VAC, 320V, 420J

DDX Series

Surface Mount LED Downlight



- Switchable CCT, 2700K, 3000K, 3500K, 4000K and 5000K
- Produces 960 lumens of soft, uniform illumination
- Mounts directly to 3" or 4" round or octagonal junction box
- Can easily retrofit 4" to 6" cans with included clips and E26 base
- Energy Star and California Title 24 JA8-2019 certified

ORDERING INFORMATION Example: DDX-D6-12-C5

Series	Description
DDX-D6-12-C5	Surface Mount Downlight, 7", 12W LED, 120VAC, CCT Switchable (2700K-3000K-3500K-4000K-5000K), White Finish

ECX Series

Square LED Canopy



- Available in 8" x 8" square or large 10" x 10" square configurations
- Power switchable between 20W-30W-40W or 40W-60W-75W
- CCT switchable between 3000K-4000K-5000K CCT
- Efficacies up to 145 LPW, DLC PREMIUM Qualified
- Sealed design for use in Wet Locations, IP65 rated
- Available sensor and battery backup options and accessories

ORDERING INFORMATION Example: ECX-75-CP-WH-SC

Series	Wattage	CCT	Finish	Options
ECX	40 = 40W (Switchable; 20W-30W-40W)	CP = 3000K-4000K-5000K	BR ¹ = Bronze	SC = Sensor
	75 = 75W (Switchable; 40W-60W-75W)			

Accessories² (Field Installed)

ECX-BB-WH = 15W Battery Backup Kit White Finish

ECX-BB-BR = 15W Battery Backup Kit Bronze Finish

TL-MSH12-REMOTE = Remote Control for Sensor

MC-TR = 12.5" Transition Plate, White Finish

MC-TR16 = 16" Transition Plate, White Finish


Notes

¹ Only available on ECX-40 configuration

² Order as a separate line item; shipped in separate box for field installation

LPX-CP Series

Color and Power Switchable LED Flat Panel

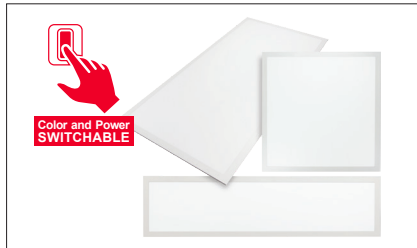

- Multiple lumen packages from 9,100 to 30,000 lumens
- Efficacies up to 140 LPW maximize energy savings
- Sealed design for use in Wet Locations, IP65 Rated
- 3/4" Hook, 6' whip and security cable included
- DesignLights Consortium® (DLC) Qualified
- Battery backup, integral sensor and mounting options available

ORDERING INFORMATION Example: LPX-22-CP


Model	Description
LPX-14-CP ¹	LED Flat Panel, 1' x 4' Backlit, Power Switchable 20W/30W/40W, Color Switchable 3500K/4000K/5000K CCT, 120-277VAC
LPX-22-CP ¹	LED Flat Panel, 2' x 2' Backlit, Power Switchable 20W/30W/40W, Color Switchable 3500K/4000K/5000K CCT, 120-277VAC
LPX-24-CP ²	LED Flat Panel, 2' x 4' Backlit, Power Switchable 30W/40W/50W, Color Switchable 3500K/4000K/5000K CCT, 120-277VAC

	Accessories ³ (Field Installed)
	LBD-5-NC-CW-C ^{4,5} = 5 Watt Battery Pack for Emergency Egress
	LBD-7-NC-CW-C ^{4,5} = 7 Watt Battery Pack for Emergency Egress
	LBD-10-NC-CW-C ^{4,5} = 10 Watt Battery Pack for Emergency Egress
	LBD-13-NC-CW-C ^{4,5} = 13 Watt Battery Pack for Emergency Egress
	LBD-17-NC-CW-C ^{4,5} = 17 Watt Battery Pack for Emergency Egress
	LPX-CMK = Y Cable Suspension Mount Kit
	LP14-FMK = 1' X 4' Flange Mount Kit
	LP22-FMK = 2' X 2' Flange Mount Kit
	LP24-FMK = 2' X 4' Flange Mount Kit
	LPX-14-SMK = 1' x 4' Surface Mount Kit
	LPX-22-SMK = 2' x 2' Surface Mount Kit
	LPX-24-SMK = 2' x 4' Surface Mount Kit
	MC6-6 = Metal Clad 6' (6 Conductor) #18 Leads Whip (For Dimming Applications)

Notes

- ¹ Panels are packaged in quantity of four (4pcs/carton)
- ² Panels are packaged in quantity of two (2pcs/carton, 4pcs/master carton)
- ³ Order as a separate line item. Shipped in a separate box for final installation in the field
- ⁴ See back page for battery pack lumen output. Not compatible with LPxx-SMK kit
- ⁵ Consult [LBD spec sheet](#) for more details on battery pack, must be remote mounted

LPX Series
LED Flat Panel

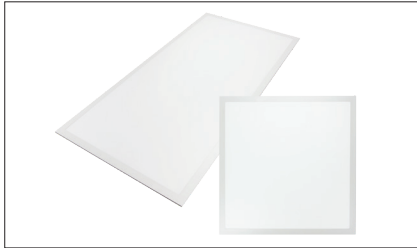

- 2' x 2' and 2' x 4' configurations, 40W or 60W
- Available in 3000K, 3500K, 4000K and 5000K CCT
- Efficacies up to 126 LPW maximize energy savings
- DesignLights Consortium® (DLC) Qualified

ORDERING INFORMATION Example: LPX-24-60-35K-P

Series/Size/Wattage	CCT	Configuration	Accessories ⁹ (Field Installed)
LPX-22-40 ^{1,4} = 2' x 2', 40W (Standard only)	3K ⁶ = 3000K	Blank ⁷ = Standard	LBD-5-NC-CW-C ¹⁰ = 5 Watt Battery Pack for Emergency Egress
LPX-24-40 ^{2,5} = 2' x 4', 40W (Standard only)	35K = 3500K	P ⁸ = Premium	LBD-7-NC-CW-C ¹⁰ = 7 Watt Battery Pack for Emergency Egress
LPX-24-60 ^{3,5} = 2' x 4', 60W (Premium only)	4K = 4000K		LBD-10-NC-CW-C ¹⁰ = 10 Watt Battery Pack for Emergency Egress
	5K = 5000K		LBD-13-NC-CW-C ¹⁰ = 13 Watt Battery Pack for Emergency Egress
Notes			LBD-17-NC-CW-C ¹⁰ = 17 Watt Battery Pack for Emergency Egress
¹ Consult factory on availability and lead time of 3K & 5K configurations			LPX-CMK = Y-Cable Suspension Mount Kit
² Consult factory on availability and lead time of 35K configuration			LP22-FMK = 2' X 2' Flange Mount Kit
³ Consult factory on availability and lead time of 5K configuration			LP24-FMK = 2' X 4' Flange Mount Kit
⁴ Panels are packaged in quantity of four (4pcs/carton)			LPX-22-SMK = 2' x 2' Surface Mount Kit
⁵ Panels are packaged in quantity of two (2pcs/carton, 4pcs/master carton)			LPX-24-SMK = 2' x 4' Surface Mount Kit
⁶ Not a DLC qualified model			MC6-6 = Metal Clad 6' (6 conductor) #18 Leads whip (for use in dimming applications)
⁷ Select this option for LPX-22-40 & LPX-24-40 (only option available)			
⁸ Select this option for LPX-24-60 (only option available)			
⁹ Order as a separate line item. Shipped in a separate box for final installation in the field			
¹⁰ See back page for battery pack lumen output. Not compatible with LPX-xx-SMK kit. Consult LBD spec sheet for more details on battery pack, must be remote mounted			

EQHB Series

High-Performance LED Linear Highbay



- Multiple lumen packages from 12,000 to 50,500 lumens
- Efficacies up to 142 LPW
- Available in 4000K and 5000K CCT, CRI ≥80
- 5' Adjustable cable mount included
- Central compartment easily accessible from the front to allow for easy wiring or accessory installation

ORDERING INFORMATION Example: EQHB-180-D-VS-4K

Series	Wattage	Distribution	Input Voltage	CCT	Options (Factory Installed)
EQHB	90 = 90W	D = General Diffused	VS = 120/277VAC	4K = 4000K	BB ¹ = Battery backup
	130 ¹ = 130W		HVS ³ = 347/480VAC	5K = 5000K	LC6 = 6' Line cord, blunt end (300V)
	180 = 180W				LC6T = 6' Line cord, L7-20P plug (300V)
	210 = 210W				LC15 = 15' Line cord, blunt end (300V)
	270 = 270W				LC15T = 15' Line cord, L7-20P plug (300V)
	300 = 300W				MC15 = 15' Line cord (metal clad), blunt end (300V)
	370 ² = 370W				SC = Dimming occupancy sensor (Integral)

Accessories⁵ (Field installed)

EHB-CTY10 = 10' Cable Mount with Integral Y-Toggles (Pack of 2)
LC6 = 6' Line cord, blunt end (300V)
LC6T = 6' Line cord, L7-20P plug (300V)
LC15 = 15' Line cord, blunt end (300V)
LC15T = 15' Line cord, L7-20P plug (300V)
STMEQHB = Stem/conduit and surface mount for 90W & 130W configurations
STMEHB = Stem/conduit and surface mount for 180W & 210W configurations
STMLHB = Stem/conduit and surface mount for 270W, 300W & 370W configurations
TL-MSSW ⁶ = Dimming occupancy sensor (120-277VAC)
TL-MSSW-REMOTE = Remote for -SC and TL-MSSW dimming sensors
TL-OCCSNSD-120/277 = On/off occupancy sensor (120/277VAC)
20300032 = Field-installed In-line 10kVA surge protector for 120/277VAC, 320V, 420J
20300033 = Field-installed In-line 10kVA surge protector for 347/480VAC, 1500V, 570J
WG-EQHB12 ¹ = Wireguard kit for 90W and 130W configurations
WG-EQHB22 ¹ = Wireguard kit for 180W and 210W configurations
WG-EQHB24 ¹ = Wireguard kit for 270W, 300W and 370W
MC6-6 = Metal Clad 6' (6-conductor) #18 leads whip (for dimming applications)

Notes

¹ With BB option, only available in size 23.6" x 15.7" x 1.8"

² Longer lead times apply, consult factory for details

³ Not compatible with BB or SC options, contact factory for line cords compatible with HVS option

⁴ Consult factory for BB option combined with line cord options,

1000 lumens, 8W on the 90W and 130W configurations,

2000 lumens, 16W on the 180W-370W configurations

⁵ Order as a separate line item, shipped in a separate box for installation in the field

⁶ TL-MSSW is factory install only, as SC, if ordered with BB

CBLQ Series

CCT and Power Switchable LED Center Basket



- 2' x 2' and 2' x 4' configurations, 40W or 60W
- Available in 3000K, 3500K, 4000K and 5000K CCT
- Efficacies up to 126 LPW maximize energy savings
- DesignLights Consortium® (DLC) Qualified

ORDERING INFORMATION Example: CBLQ-22-CP-BB

Series	Description	Options
CBLQ-22-CP ¹	Low-Profile LED Center Basket, 2' x 2', Power Switchable 25W/30W/35W, Color Switchable 3500K/4000K/5000K CCT, 120-277VAC, 0-10V Dimming Driver, White Finish	BB = Battery Backup
CBLQ-24-CP ¹	Low-Profile LED Center Basket, 2' x 4', Power Switchable 34W/42W/50W, Color Switchable 3500K/4000K/5000K CCT, 120-277VAC, 0-10V Dimming Driver, White Finish	

Notes	Accessories ² (Field Installed)
¹ All Panels are packaged in quantity of two (2pcs/carton)	LPX-CMK = Y Cable Suspension Mount Kit
² Order as a separate line item; shipped in separate box for field installation	LP22-FMK = 2' X 2' Flange Mount Kit
	LP24-FMK = 2' X 4' Flange Mount Kit
	LPX-22-SMK = 2' X 2' Surface Mount Kit
	LPX-24-SMK = 2' X 4' Surface Mount Kit
	MC6-6 = Metal Clad 6' (6 Conductor) #18 Leads Whip (For Dimming Apps.)

BWQ Series

4' Economy LED Wrap Luminaire



- 4' Length with clean, modern aesthetics
- Provides 4400 lumens, up to 117 LPW
- Easy ceiling surface mount installation
- DesignLights Consortium® (DLC) Qualified

ORDERING INFORMATION Example: BWQ-4-38-4K

Model	Size	Wattage	CCT
BWQ	4 = 4'	38 = 38W	3K ¹ = 3000K
			35K = 3500K
			4K = 4000K
			5K = 5000K

Notes

¹ Not a DLC Qualified model

EWQ Series

CCT & Power Switchable LED Wrap Luminaire



- Cost effective 4' long LED wrap luminaire
- Power switchable between 32W, 40W and 48W
- CCT Switchable from 3500K, 4000K and 5000K CCT
- Easy ceiling or wall installation in new construction or retrofit
- Up to 123 LPW, DesignLights Consortium® (DLC) Qualified

ORDERING INFORMATION Example: EWQ-4-CP

Model	Description
EWQ-4-CP	Low-Profile LED Wrap, 4' Length, Power Switchable 32W/40W/48W, Color Switchable 3500K/4000K/5000K CCT, 120-277VAC, 0-10V Dimming Driver, White Finish

FTK Series

Indoor LED Ribbon Tape Kit



- Energy-efficient LEDs consume 2.25W/ft and 5.56W/ft
- Available in 2700, 3000 and 4000 Kelvin temperatures
- Flexible, front-to-back bending orientation
- Rated for indoor use
- Slim design allows installation in tight spaces without being visible
- Dimmable to 10% with dimming driver and magnetic dimmer (Supplied by others)

ORDERING INFORMATION Example: FTK-3000-16-24V-5050

Series	CCT ¹	Length	Voltage ²	LED Selection
FTK	2700 = 2700K	16 = 16.4'	24V = 24 Volt DC	3528 = SMD3528, 2.25W/ft
	3000 = 3000K			5050 = SMD5050, 5.56W/ft
	4000 = 4000K			

Notes

¹ Color temperatures can vary $\pm 5\%$

² Requires [dimming](#) or [non-dimming](#) driver, ordered separately



QUALITY PRODUCTS BRANDS YOU TRUST

We've curated a line of products in the most popular configurations combined with our most competitive pricing, designed for convenience, maximum reliability and easy installation and maintenance.

EXITRONIX[™] EMERGENCY LIGHTING SOLUTIONS



TRACE[★]LITE COMMERCIAL & INDUSTRIAL SOLUTIONS



specialtyLED[™] COMMERCIAL & DECORATIVE SOLUTIONS



10840446 04/22