



IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment, basic safety precautions should always be followed including the following:

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable.
- Do not mount near gas or electrical heaters.
- Equipment should be mounted in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.
- Proper grounding of the fixture is essential for protection from shock, correct operation of the electronic driver and the elimination of electrical interference.
- To reduce the risk of death, personal injury, property damage from fire, electric shock, falling parts, cuts and abrasions, and other hazards, read all warnings and instructions included with and on the fixture.
- This fixture should not be used in areas with limited ventilation or high ambient temperatures.
- All wiring connections should be capped with UL approved wire connectors.
- Wear gloves and safety glasses at all times when removing luminaire from the carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and dispose of packing material, as these may be hazardous to children.
- Allow fixture to cool before handling. Do not touch enclosure or light source.
- Keep combustible and other materials that can burn away from the luminaire and lamp/lens.
- Minimum 90 degree supply for conductors.

SAVE THESE INSTRUCTIONS!

Technical Support ■ (623) 580-8943 ■ technicalsupport@barronltg.com

Preparing The Fixture For Installation

1. Carefully remove the diffuser by grasping the edge of the back plate and pulling upward (Fig. 1).
2. Open the wire cover by gently pressing inward to release the cover from the thumbnail lances on the housing (Fig. 2).

Fig. 1


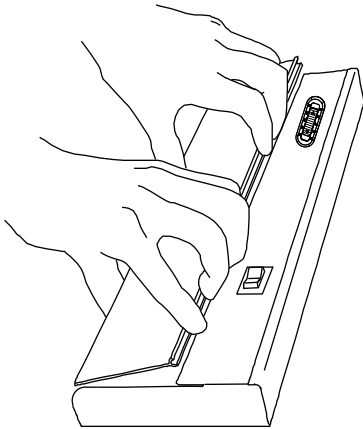


Fig. 2

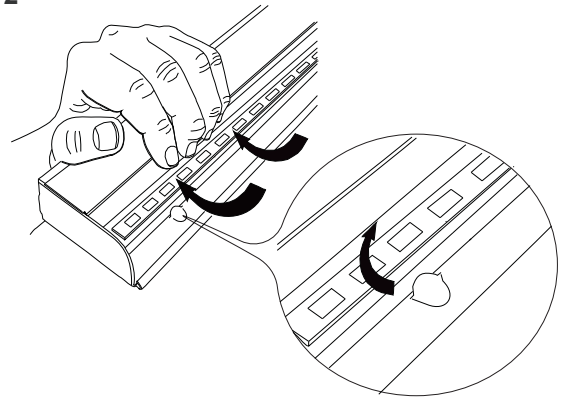

Direct Wire Method

1. Remove the knock-out that is nearest to the location of the incoming wires (Fig. 3).
2. Mount and secure the strain relief connector to the fixture housing. Leave the strain relief screws loose (Fig. 4).
3. Secure the fixture on the desired location using the adequate screws (Fig. 5).
4. Make electrical connections; see **Electrical Connections** section. (Fig. 6).
5. Reattach the wire cover and diffuser, then select the desired CCT (Fig. 7).

Fig. 3




Fig. 4

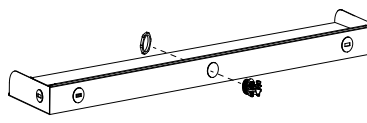


Fig. 5

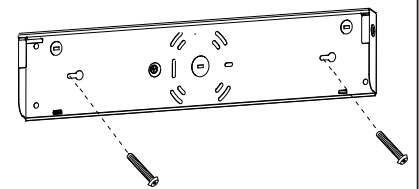


Fig. 6


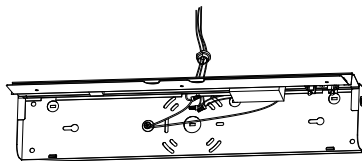


Fig. 7

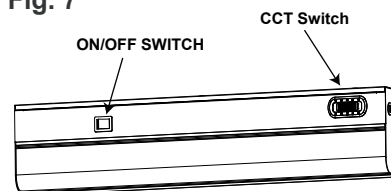

Junction Box Method

1. Remove the center knock-out (Fig. 8).
2. Make electrical connections; see **Electrical Connections** section (Fig. 9).
3. Secure the fixture on the junction box using the adequate screws (Fig. 10).
4. Reattach the wire cover and diffuser, then select the desired CCT (Fig. 11).

Fig. 8

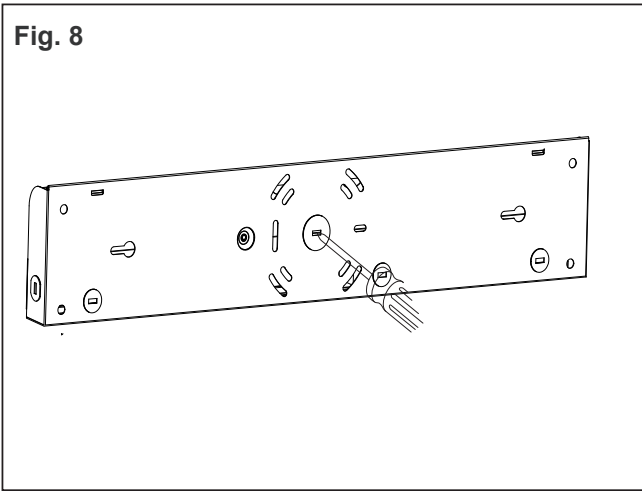


Fig. 9

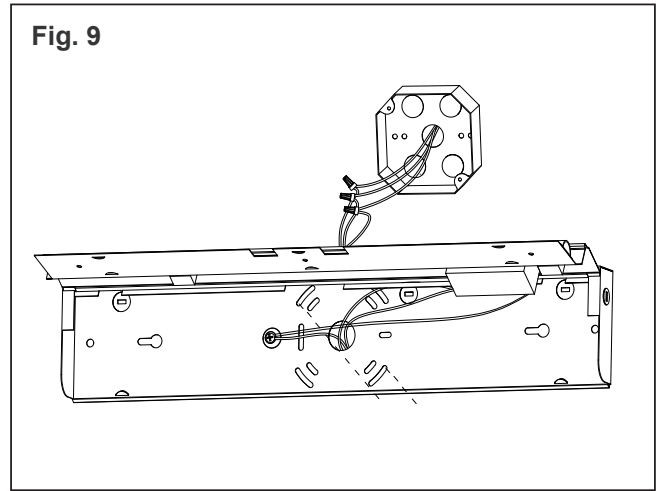


Fig. 10


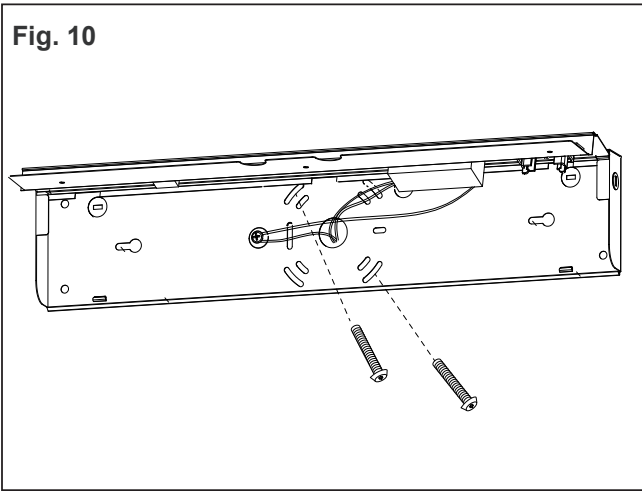


Fig. 11



Electrical Connections

All electrical connections should be made inside the junction box. Make electrical connection as follows:

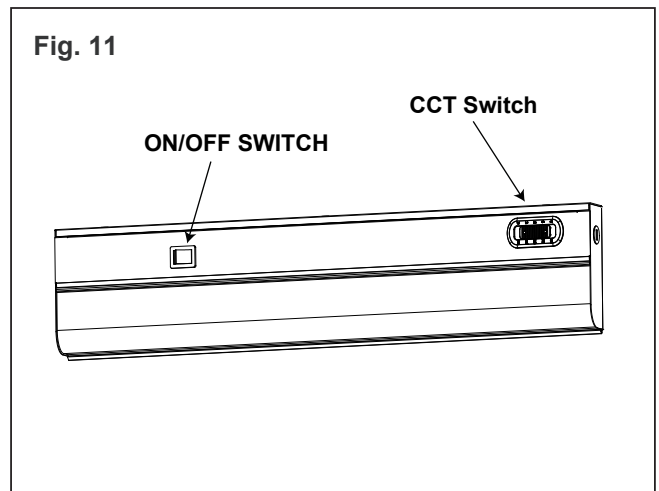