



IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment, basic safety precautions should always be followed including the following:

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable.
- Do not mount near gas or electrical heaters.
- Do not use outdoors.
- Equipment should be mounted in locations and at heights (MAX: 8ft) where it will not be readily subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.
- Allow battery to charge for 24 hours before first use.

E

SAVE THESE INSTRUCTIONS!

Technical Support ■ (623) 580-8943 ■ technicalsupport@barrontlg.com

Ceiling or End Mount (Fig. 1 & 2)

1. Make electrical connections; see **Electrical Connections** section.
2. Fasten canopy to J-box mounting plate.
3. Snap enclosure to canopy.
4. Secure faceplate to enclosure and remove chevrons, as desired.

Wall Mount

1. Make electrical connections; see **Electrical Connections** section.
2. Fasten backplate to J-box.
3. Snap enclosure to backplate.
4. Secure faceplate to enclosure and remove chevrons, as desired.

Fig. 1 - Ceiling Mount




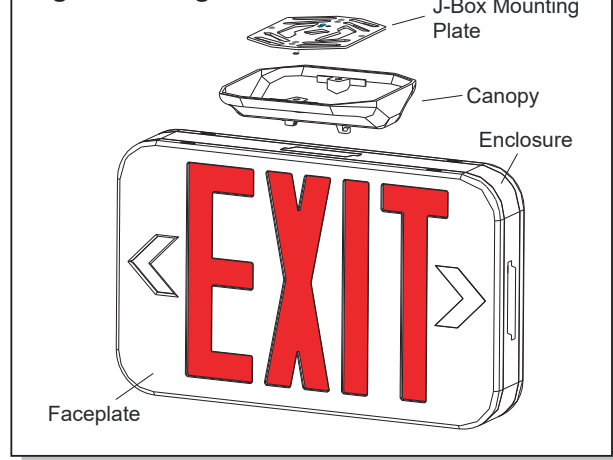


Fig. 2 - End Mount

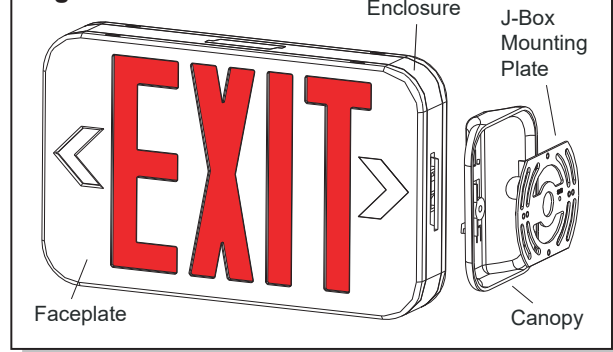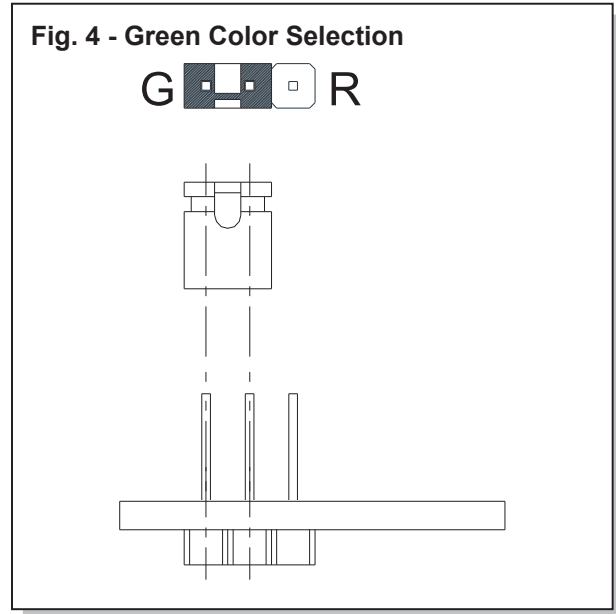

Operation

1. The unit is shipped from the factory with the color selector jumper set to "RED" (see Fig. 3 - jumper is placed across pins 2 & 3) and use the red diffuser.
2. To change the color to "GREEN," move the color selector jumper to "GREEN" (see Fig. 4 - jumper is placed across pins 1 & 2) and use the green diffuser.

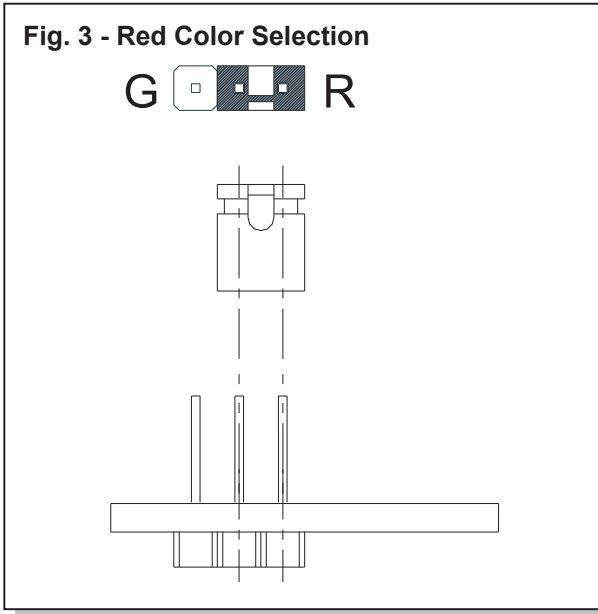

Electrical Connections (Fig. 5 & 6)

All electrical connections should be made inside the junction box. Make electrical connections as follows:

Note: Cap unused leads to prevent shorting.

120VAC

White - Common

Black - 120VAC

277VAC

White - Common

Red - 277VAC

