



IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment, basic safety precautions should always be followed including the following:

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable.
- Do not mount near gas or electrical heaters.
- Do not use outdoors.
- Equipment should be mounted in locations and at heights (MAX: 9ft) where it will not be readily subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.
- Allow battery to charge for 24 hours before first use.

E

SAVE THESE INSTRUCTIONS!

Technical Support ■ (623) 580-8943 ■ technicalsupport@barrontlg.com

Ceiling Mount



1. Make electrical connections; see **Electrical Connections** section.
2. Fasten J-box mounting plate to J-box.
3. Fasten canopy to J-box mounting plate.
4. Snap enclosure to canopy.
5. Connect and trim input leads to socket leads at upper left corner of housing wire channel.
6. Mount two remote lamp heads at most.
7. Secure faceplate to enclosure and remove chevrons, as desired.

Wall Mount

1. Make electrical connections; see **Electrical Connections** section.
2. Remove necessary knockouts and fasten backplate to J-box.
3. Snap enclosure to backplate.
4. Connect and trim input leads to socket leads at upper left corner of housing wire channel.
5. Mount two remote lamp heads at most.
6. Secure faceplate to enclosure and remove chevrons, as desired.

Operation

1. The unit is shipped from the factory with the color selector jumper set to "RED" (see Fig. 3 - jumper is placed across pins 2 & 3) and use the red diffuser.
2. To change the color to "GREEN," move the color selector jumper to "GREEN" (see Fig. 4 - jumper is placed across pins 1 & 2) and use the green diffuser.

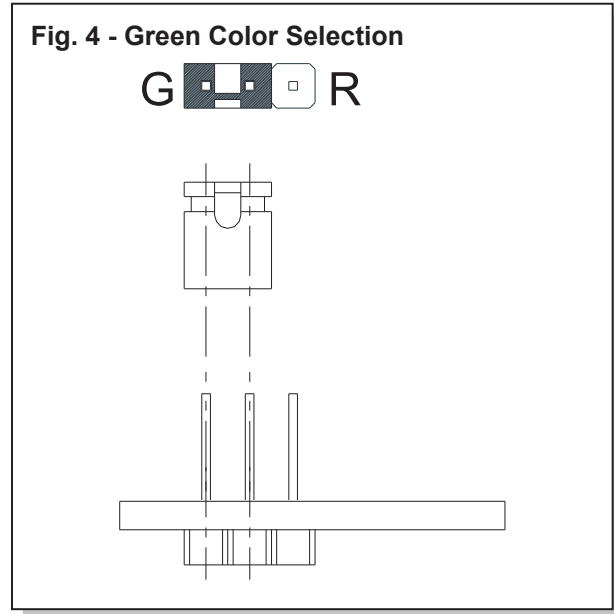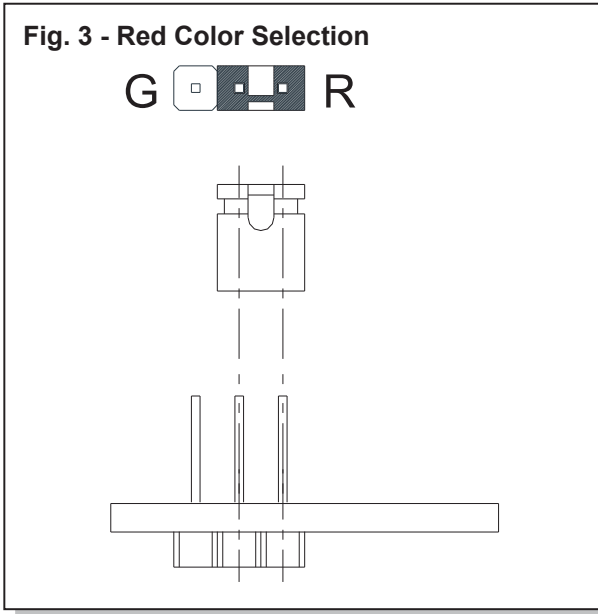

Electrical Connections (Fig. 5 & 6)

All electrical connections should be made inside the junction box. Make electrical connections as follows:

Note: Cap unused leads to prevent shorting.

120VAC

White - Common

Black - 120VAC

277VAC

White - Common

Red - 277VAC

