

# LE-SW3

## Installation Instructions



## IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

When using electrical equipment, basic safety precautions should always be followed including the following:

- **DISCONNECT AC POWER SUPPLY BEFORE SERVICING.**
- Installation and servicing of this equipment should be performed by qualified service personnel only.
- Ensure that the electrical wiring conforms to the National Electrical Code NEC® and local regulations if applicable.
- Do not mount near gas or electrical heaters.
- Equipment should be mounted in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Any modification or use of non-original components will void the warranty and product liability.
- Do not use this equipment for other than intended use.

## SAVE THESE INSTRUCTIONS!

Technical Support ■ (623) 580-8943 ■ [technicalsupport@barronltg.com](mailto:technicalsupport@barronltg.com)


# LE-SW3

## Installation Instructions

### Wiring (Fig. 1)

1. Remove current wall plate mounting screws.
2. Carefully remove the switch from the switch box. **DO NOT** disconnect the wires.
3. There are three wiring connections on the switch, these are marked **HOT, NEUTRAL** and **GROUND**.
4. Disconnect the wires from the existing switch.
5. Connect the green wire to the **GROUND** terminal.
6. Connect the white wire to the terminal marked **NEUTRAL**.
7. Connect the black wire to the terminal marked **HOT**.
8. Check connections to be sure they are tight and no bare conductors are exposed.
9. Insert the switch into the outlet box carefully.
10. Make sure to attach the switch to the box using the supplied screws.
11. Attach the wall plate.
12. Restore power to the circuit breaker and test the system.

**Fig. 1**

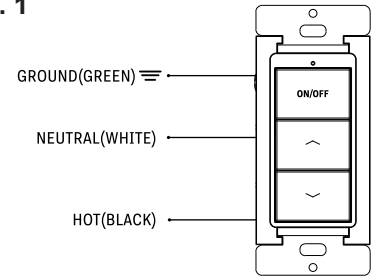


- Wire Strip Length; 16 mm (5/8 in.)
- The device shall install in a standard outlet box.

### Installation (Fig. 2)

1. Follow the instructions to connect bluetooth wall switch to the lights. (Fig. 1)
2. Press buttons ① and ② together for over 3 seconds to enter pairing mode or achieve reset function. This switch can be scanned in the next 30 seconds. (Fig. 2)
3. In the LiteLogic App "Switch" page, click to add the switch.
4. Select the light / light group to be controlled by this switch.
5. For detailed operation please refer to LiteLogic App instructions.

**Fig. 2**



**NOTE: This Bluetooth device is compatible with LiteLogic lighting control system only.**

### How to Install LiteLogic App?

Scan QR Code below to download the APP.

Get it from the  
**App Store**



Get it from  
**Google Play**



### How to Control Lights with a Phone?

Scan the QR Code below for APP instructions.

