

Includes 4-way, field-selectable 8" ducts, screens, or covers for full-sealed and non-sealed configurations

Can be operated with lens for superior air-cooling, lamp and reflector protection or without lens for non air-cooled applications

Unique new K12x30S sockets make re-lamping easy

Constructed of heavy-duty 22 gauge steel with 1/8" thick tempered glass lens

Includes 15' ballast cord, and one (1) pair of V-hooks for mounting

315w-1000w DE standard or high frequency lamps





DE LAMP 315W-1000W ITEM# GLH-HDE-8



RELATED PRODUCTS












1000W DE RE HIGH PRESSURE SODIUM 2000K





SE OR DE ENABLED 400W-600W-1000W SWITCHABLE SLIM BALLAST

1000 DE

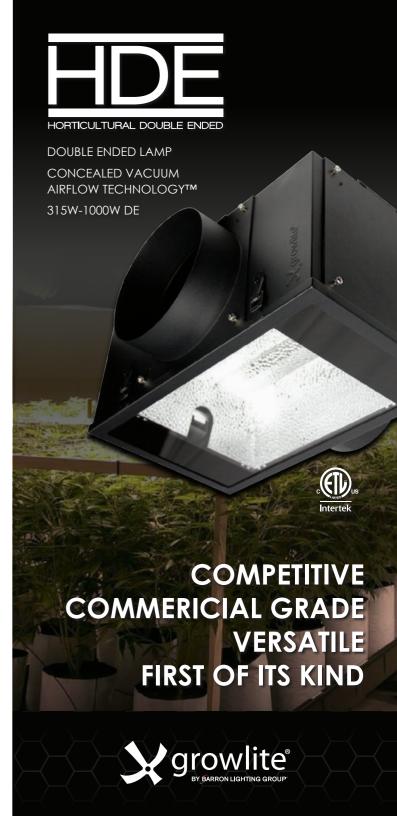



7885 N Glen Harbor Blvd Glendale, Arizona 85307 800.533.3948 Fax 623.580.8948



For the complete line of growlite® products, visit us online at www.growlite.com

