

DESCRIPTION

The second generation of the TLED canopy series features upgraded SSL light engines with more performance levels to choose from, a newly added housing design that is exclusive to TRACE*LITE. The upgraded TLED-C maintains a low profile design, the TLED-RC is for recessed applications. All three housings are combined with our next generation high performance LED light engines featuring our superior thermal management that makes the entire family an attractive, energy saving choice. Constructed of die formed and welded aluminum, the TLED canopy series has been engineered to deliver optimum optical performance and lamp longevity. The attractive and durable housings have a UV resistant, powder coated finish to protect against the elements and are ETL Listed for Wet Locations. Our TLED canopy series incorporate contractor friendly features that allow for ease of installation in a variety of applications and allow them to be installed by a single person. Available with different LED light engine configurations with multiple lumen outputs. The TLED canopy series provide an energy saving solution to a wide spectrum of applications including, but not limited to security lighting in schools, office complexes, light commercial development, apartments, parking garages, entryways, and stairwells. The TLED canopy series is DesignLights Consortium™ (DLC) qualified and meets or exceeds the efficacy requirements for various rebate programs across the country (consult DLC QPL website for listed models).

SPECIFICATIONS

Construction:

Precision die formed aluminum housings feature clean architectural lines with ample, integral mounting space for future accessories. The TLED canopy series's most important construction feature is their integral thermal management. The housing is fabricated using 1/8" aluminum plate, which not only provides strength and durability but also acts as a substantial heat sink and allows for optimum performance and durability of the LED light engine without sacrificing design aesthetics or increasing the outside dimensions of the housing. LEDLITE/logic heat sinking technology moves heat away from the LEDs by taking advantage of thermal convection dynamic properties and maximizing system performance that delivers up to a 190,000 hour life with 70% lumen maintenance. The TLED canopy series is ETL Listed for Wet Locations, and incorporates a UV resistant, long lasting, polyester based powder coated finish.

Optics:

The TLED canopy series of luminaires deliver exceptional light quality and efficiency with a garage optic design that provides excellent Type VS distribution. Our garage optic provides more lumens in the 60° to 80° zone, which satisfies the DLC requirements for parking garage luminaires. The stabilized optical PMMA lenses are specifically designed to distribute light where it is needed in the most efficient way possible making it the ideal luminaire for high efficiency applications.

Electrical:

The available LED light engine wattages are powered by 0-10V dimmable, constant current control drivers and provide up to a 190,000 hour rated life with 70% lumen maintenance, at 4700K CCT, and a CRI of ≥72. All drivers are Class 2 power supplies with input voltage range of 120VAC to 277VAC, providing a Class A EMI rating and a high power factor of ≥0.90. The TLED series canopies are suitable for operation in -40°F to 104°F (-40°C to 40°C) ambient conditions.

Thermal Management:

LEDLITE/logic heat sinking technology moves heat away from the LEDs by taking advantage of thermal convection dynamic properties and maximizing system performance that delivers up to a 190,000 hour life with 70% lumen maintenance.

Environmentally Friendly Design:

TLED canopy series luminaires consume very little energy and provide long life in comparison to traditional lamp technologies. The TLED-C is RoHS (Restriction of Hazardous Substances) compliant and provides a significant reduction in KW load and carbon emissions.

Installation:

The TLED canopy series can be installed and wired by a single person. The base plate easily attaches to a 3" or 4" J-box, and the fixture housing is attached to the base plate by four (4) captive fasteners. The TLED-C can be surface mounted to a recessed J-box or pendant mounted using a standard 1/2" downrod & hardware (supplied by others). The TLED-RC can be recessed mounted.

Battery Back-up (Option: BB):

TRACE*LITE's battery back-up option provides approximately 1400 lumens for 90 minutes in the event of a primary power failure. The battery back-up option includes a battery pack along with a charging/transfer device that keeps the battery pack charged during normal AC operation and transfers battery power to a portion of the LED modules when the device senses that the primary AC power has failed. Suitable for operation in 32°F to 104°F (0°C to 40°C) ambient conditions.

Transient Protection System (Option: TP):

The LEDLITE/logic optional transient protection device is designed to be used in conjunction with our LED drivers. The "-TP" option utilizes a 3-leaded device that protects Line-Ground, Line-Neutral, and Neutral-Ground in accordance with IEEE/ANSI C62.41.2 guidelines. The surge current rating of the "-TP" option is 10,000 amps.

Model: _____ Date: _____
 Accessories: _____
 Job Name: _____ Type: _____

AVAILABLE WHILE SUPPLIES LAST



Specs at a Glance				
	18 LED	24 LED	36 LED	64 LED
Wattage (Nominal)	21W	28W	41W	72W
Ingress Protection	ETL Listed for Wet Locations			
Lumens (lm)	1907	2817	4119	7249
Efficacy (LPW)	92	101	100	100
CCT	4700K			
Input Voltage	120~277 Voltage Sensing			
Optics	Garage Optic - Type V Short			
CRI	≥72			
Warranty	5 Years			
Ambient Temp	-40°F to 104°F (-40°C to 40°C)			

Testing & Compliance:

The reliability and performance of the TLED canopy series luminaires are evaluated in accordance with the parameters outlined and reported by LM-79 and LM-80 documents. Photometric data is tested to IESNA LM-79-08 standard by an independent testing laboratory. Lumen maintenance, or L70, a measure of long term reliability, is determined for the light source, which consists of the LED and PSB sub-assembly as installed in the luminaire, using LM-80 in-situ thermal and reliability data as provided by the LED manufacturer in accordance with DOE/EPA standards.

Listing:


The TLED-C and TLED-RC are ETL certified under UL1598 specifications and listed for wet locations.

Warranty:


Any component that fails due to manufacturer's defect is guaranteed for 5 years. The warranty does not cover physical damage, abuse or acts of God. Manufacturer reserves the right to charge for such repairs if deemed necessary.

Dimensions

SURFACE STANDARD



RECESSED

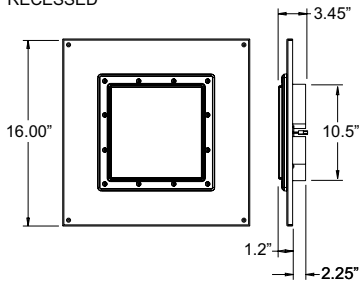

Approximate Weight: 14 lbs.

Sample Photometrics


TLED-C-36-VS-G

IES: TYPE V Short

MOUNTING HEIGHT: 10'

TILT: ZERO

HORIZONTAL SPACING CRITERIA: 2.88

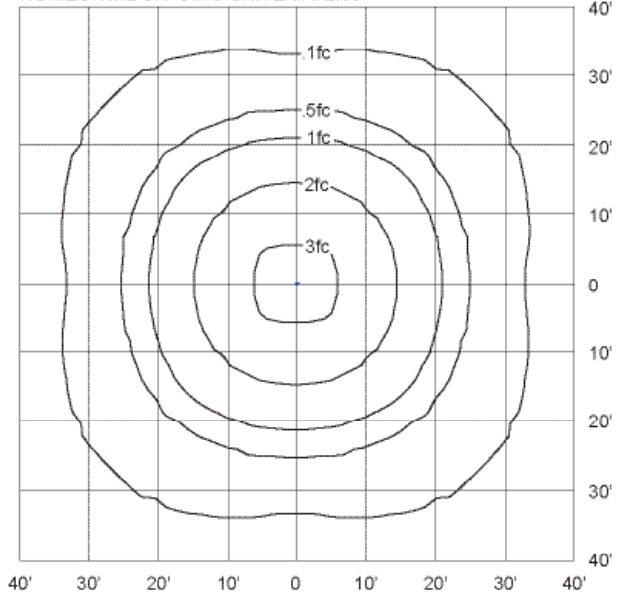

Ordering Information

Example: TLED-C-24-VS-G-WW

Series	# of LEDs	Input Voltage	Optics	Finish (Housing/Trim)	Options (Factory Installed)
TLED-C = Standard Canopy	18 = 18 LEDs	VS = 120~277VAC (Voltage Sensing)	G ¹ = Garage Optics	BR ² = Bronze/Bronze	BB ⁴ = Battery Back-up
TLED-RC = Recessed Canopy	24 = 24 LEDs		P = Performance Optics	SW ³ = Silver/White	TP = Transient Protection System
	36 = 36 LEDs			WW = White/White	
	64 = 64 LEDs				

Notes

¹ Not available on recessed (TLED-RC) units

² Only available on TLED-C-64-VS-G model

³ Not available on all models, consult factory for limited availability

⁴ 120V and 277V operation, 0-10V dimming not available, not ETL listed and only available with TLED-C-24-VS-G-WW model. Consult factory for details

⁵ Order as separate line item

Accessories⁵ (Field Installed)

TLED-C-CP-WW = Canopy Trim Kit (for mounting to surface mount junction box)